



ADDER TS4

Bespoke keyboard and mouse switch for dealing and trading room environments.

Created specifically for the rigorous demands of the financial services industry, the Adder TS4 is a 4-way keyboard and mouse switch that enables users to control up to 4 different computers, such as Bloomberg, PC and Sun, each with their own display.

ADDER DATA SHEET - ADDER TS4




FEATURES

Compatibility

The Adder TS4 is compatible with all common computers and operating systems including PC, Sun, Bloomberg and Apple.

Choice of switching method

As with all Adder switching products, the Adder TS4 can switch from one computer to another by using keyboard hotkey combinations, three button or wheel mouse or the button on the TS4 itself. The selected channel is shown on the 7-segment display.

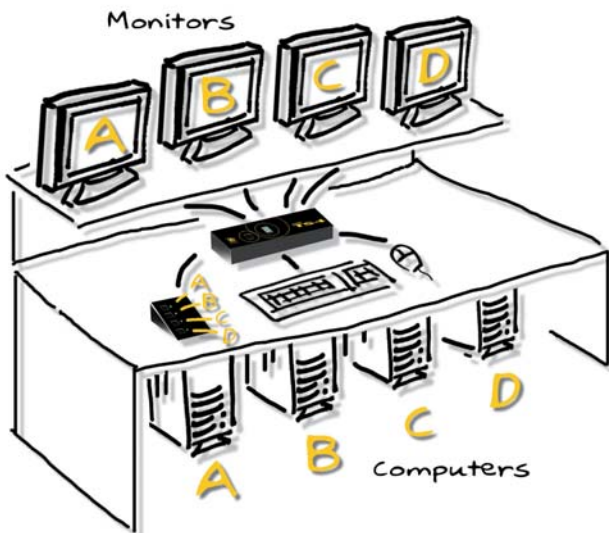

Remote switching options

There are two remote switching options, Adder's RC1, which provides a low profile, single button switch with a 7-segment LED display or the specifically designed TS4 remote unit, which has a button and LED display per connected computer.

Compact design

To help keep desks tidy and ease the management of cables, the Adder TS4 has been designed to fit into the cable baskets commonly found on the back of traders' desks.



ADDER TS4

Bespoke keyboard and mouse switch for dealing and trading room environments.

TECHNICAL SPECIFICATIONS

Hardware compatibility	Supports PC, RS/6000, Alpha and SGI computers using PS/2 or Sun (USB & 8-pin styles) and Mac (USB) when using the appropriate CCUSB / CCSUN interface cables. Compatible with most KVM switches.
O/S compatibility	All known software and operating systems including Windows (all), DOS, Linux, Unix, BSD, Sun OS, Solaris, Mac OS, NetWare etc
Control connections	Keyboard/Mouse: MiniDin6 Remote control: serial DB15
Input connections	Keyboard: 4 x MiniDin6 Mouse: 4 x MiniDin6
Physical design	Compact case, robust metal construction. 215mm/8.5" (w), 37mm/1.5" (h), 65mm/2.5" (d), 0.75kg/1.65lbs
Power supply	Interface powered via PC keyboard connection
Operating temperature	0°C to 40° / 32°F to 104°F
Approvals	CE, FCC

Local, Remote and Global KVM Control



ADDER CORPORATION
29 Water Street, Newburyport, MA 01950 USA
Tel: +1 888 932 3337 Fax: +1 888 275 1117
email: usasales@adder.com www.adder.com

ADDER TECHNOLOGY LIMITED
Technology House, Trafalgar Way, Bar Hill, Cambridge, CB3 8SQ UK
Tel: +44 (0)1954 780044 Fax: +44 (0)1954 780081
email: sales@adder.com www.adder.com