

## OUTDOOR DIGITAL SIGNAGE

### KIOSK PORTRAIT TYPE SCREEN

CLASS

MODEL

55"

H551SL

#### KEY FEATURES

- Special DOOH LCD Panel
- All Weather Capable (IP66)
- Sunlight Readable Brightness
- Anti-Vandal Protection
- Non AC cooled system
- Auto Brightness Control
- Remote Control (RS232)
- Easy to Service with Front Door Open



## Broadcast your branding with Hyundai Digital Signage!

HYUNDAI's Outdoor Digital Signage represents state-of-art display technology for any outdoor environment. Meeting the highest industrial standards they are provide a high degree of operational reliability and superior quality image, which are essential preconditions for attracting the attention of your target audience.



**SPECIFICATIONS**

Model	H551SL	
Panel	Screen Size (diagonal)	55"
	Active Display Area (inch/mm)	47.62 x 26.79 / 1209.6 x 680.4
	Resolution	1920 x 1080
	Aspect Ratio	16:9
	Display Colors	16.7 M
	Brightness (cd/m <sup>2</sup> ; typ.)	2500
	Contrast Ratio	1300:1
	Response Time (ms; GTG)	10
	Viewing Angle	178°/178°
	Lifetime (hours)	30,000
	Backlight type	LED
	Transflective Panel	No
	Touch Screen	Response Time (ms)
Interface		-
Touch Intensity		-
Detection Method		-
Input	VGA (15pin D-Sub)	1
	HDMI	1
	RS-232C	1
Power	Operating Voltage	100 – 120V AC, 220 – 240V AC
	Consumption (typ.)	600 W (Without PC : 25 °C)
	Consumption per nits (max.)	0.26W
	Heater Block (with PC Case)	Max 850 W / Peak 1.2 KW
Features	Auto Cooling System	yes
	Auto Heating System	yes
	Anti-Vandal Glass (inch/mm)	1.45 / 11.5
	Anti Reflection Coating	yes
	Auto Brightness Sensor	yes
Operation	Temperature (°C)	-30 ~ 50
	Humidity (%)	20 - 80
	Storage (°C)	-40 ~ 60
	OSD Language	10 Lang
Approvals	Ingress Protection	IP66
Dimension	Set (W x H x D), inch/mm	38 x 85.83 x 6.3 / 965.8 x 2180 x 160
Weight	Set (lb/kg)	385.8 / 175
Mounting (Bottom mounting)		M10 wedge anchor (6 pcs)
Computer		Option

**FEATURES**
**All Weather Capable**

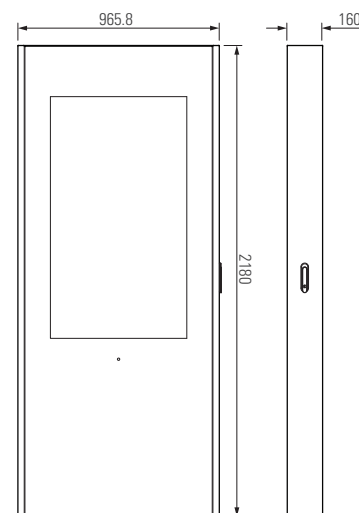
Equipped with an intelligent cooling and heating system, HYUNDAI's Outdoor Displays are well suited for withstanding any weather conditions from -30°C to +50°C.

**Sunlight Readable Brightness**

HYUNDAI provides special displays which are based on the Optical Bonding for installations in environment with the brightest lightning conditions. Make your messages and images clear and readable under even bright sunlight.

**Anti-Vandal Protection**

Thanks to a special tempered security glass, HYUNDAI's Outdoor Displays are protected against any vandalism attacks using Anti-Vandal glass bonding technique improving in durability from outside damage.

**DIMENSIONS**
**H551SL [mm]**


Specifications and design are subject to change without notice. See our website for detailed information.

UPDATE; NOV. 2012

**HEAD OFFICE - HYUNDAI IBT CO., LTD.**

106, Apogongdan-gil, Gimche on-si, Gyeongsangbuk-do, 740-862 The Republic of Korea  
Tel. +82 54 430 6426 E-mail: prio123@hyundaiibt.com  
www.hyundaiibt.com

**HYUNDAI IT AMERICA CORP.**

2051 Junction AVE., Suite 112 San Jose, CA 95131, USA  
Tel. +1 408 954 8920 email : sales@hyundaita.com  
www.hyundait.com

**HYUNDAI IT EUROPE GMBH**

Siemensstrasse 22, 63225 Langen, Germany  
Tel. +49(0) 6103-38878-100 email : info@hyundait.eu  
www.hyundait.eu

**HYUNDAI IT JAPAN**

Sunbridge Ogawamachi Bldg 4F, 2-2 Ogawamachi Kanda Chiyoda-Ku, Tokyo, Japan  
Tel. +81 3 5259 7645 email : oysk@hyundait.com  
www.hyundait.jp