

## The 80s called. They want their IR back.

The Just Add Power Flux Capacitor IR Dongle provides IR control of endpoint devices through the Just Add Power 2G and 3G product lines.


- **Connects to RS232 port on a Receiver or Transmitter**
- **Converts RS232 into an IR signal**
- **Compatible with Pronto and Global Cache IR codes**
- **Conveniently powered through Receiver USB port**




**It's all under control.** Use the Flux Capacitor IR Dongle combined with Just Add Power drivers to control all of your IR devices over a single IP connection. Each IR Dongle becomes an additional IR port on the control system!




<b>Compliance</b>	RoHS/FCC/CE
<b>Operating Temp</b>	0-60 °C / 32-140 °F
<b>Dimensions &amp; Weight</b>	39 x 28 x 10 mm 1.5" x 1.1" x 0.4" 28 g / 1 oz
<b>Ports</b>	USB micro (power) 3.5mm (IR out) 3.5mm (serial in)
<b>Power Supply</b>	DC5V, 0.5A minimum USB micro
<b>PoE</b>	N/A

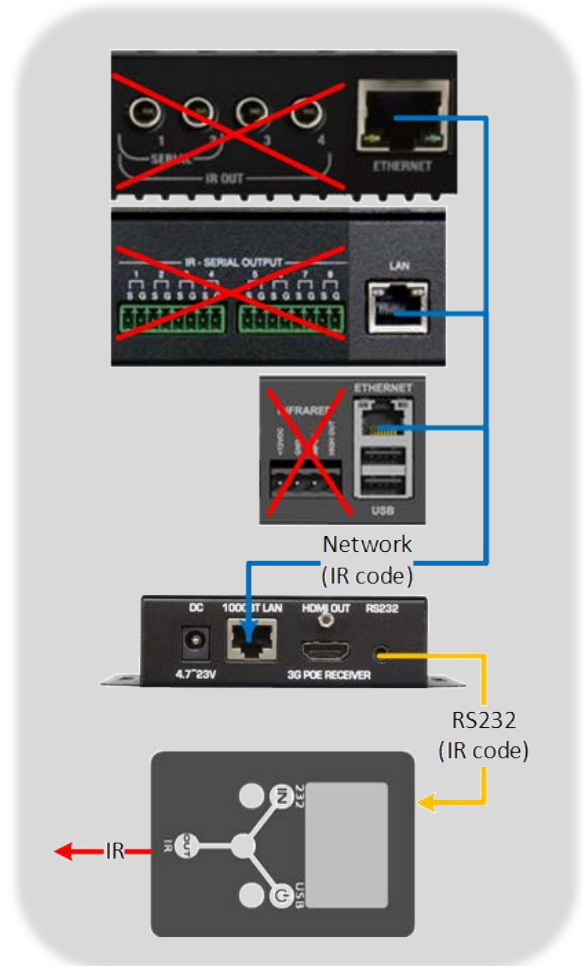

All measurements in millimeters (mm)

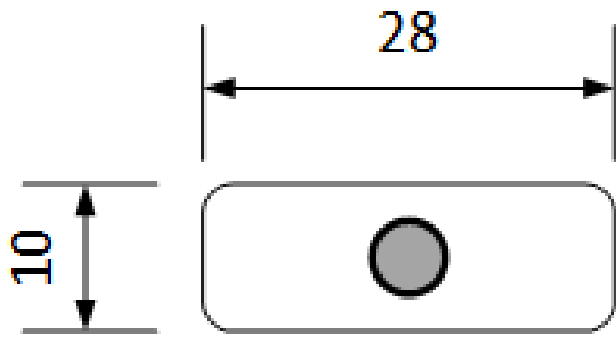

IRD Front/Back

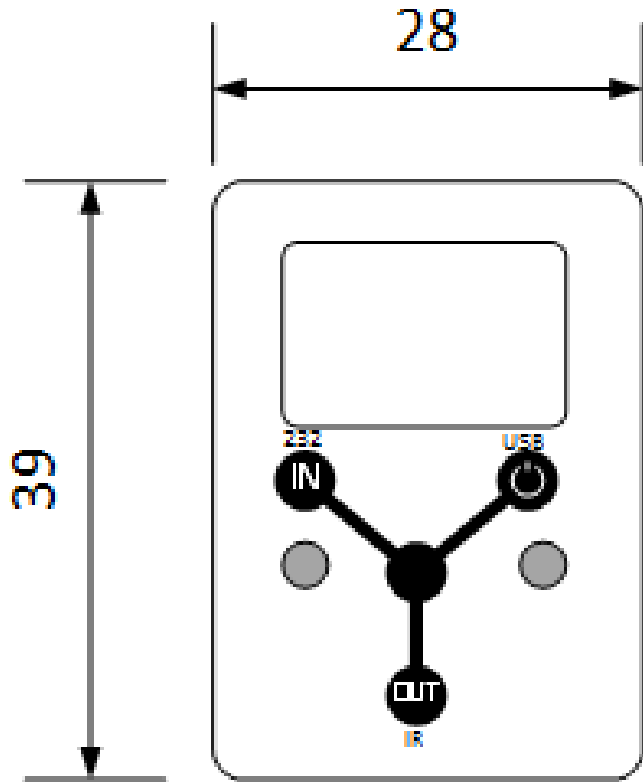

IRD Bottom